

BISTAR

TP6F60M
TP6F60M(H)

325 - 345W

9BB PERC



产品特性



9BB半片电池技术



行业领先的发电效率增益

5% - 25%



优秀的抗PID性能

TUV 85 / 85% RH 192 PID



更广泛的应用性



IP68接线盒

体系及产品认证


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

12
质量保证

25
功率保证

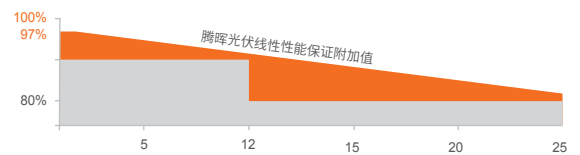

电性能参数

STC

0 ~ +3%

(Pmax/W)	325	330	335	340	345
(Vmpp/V)	33.8	34.1	34.4	34.7	34.9
(Impp/A)	9.61	9.66	9.74	9.80	9.89
(Voc/V)	40.3	40.5	40.7	40.9	41.1
(Isc/A)	10.06	10.12	10.18	10.24	10.34
m(%)	19.2	19.5	19.8	20.1	20.4

NMOT

(Pmax/W)	241	244	248	251	255
(Vmpp/V)	31.5	31.7	31.9	32.2	32.3
(Impp/A)	7.67	7.71	7.78	7.83	7.90
(Voc/V)	37.5	37.6	37.8	38.0	38.2
(Isc/A)	8.12	8.17	8.22	8.27	8.35

STC

1000W/

25

AM1.5

NMOT

800W/

20

AM1.5

1m/s

机械参数

158.75*158.75mm

120(6*20)

19kg (41.89lbs)

1684*1002*35mm (66.3*39.45*1.38inches)

300mm (11.81inches)

TUV: 4mm² (0.006inches²)/UL: 12AWG

3.2mm

3/6

(1) 31 / 806 /40

(2) 31 +4 / 858 /40

IP68

工作条件

1000V/1500V/DC(IEC)

-40°C ~ +85°C

20A

: 5400Pa/ : 2400Pa

0.1

II

100M

T01/LJQ-3-CSY/MC4/MC4-EVO2

温度特性

Pmax -0.36%/°C


Voc -0.26%/°C

Isc +0.043%/°C

NMOT 43± 2°C

I-V曲线

TP6F60M/345W

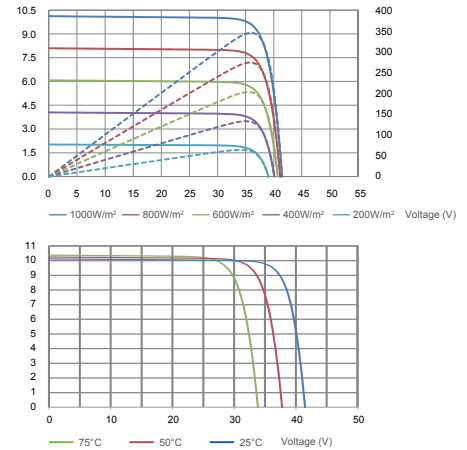

技术图

