


BISTAR

TP6H60M
TP6H60M(H) **120 half-cell**

320 - 340W

PERC

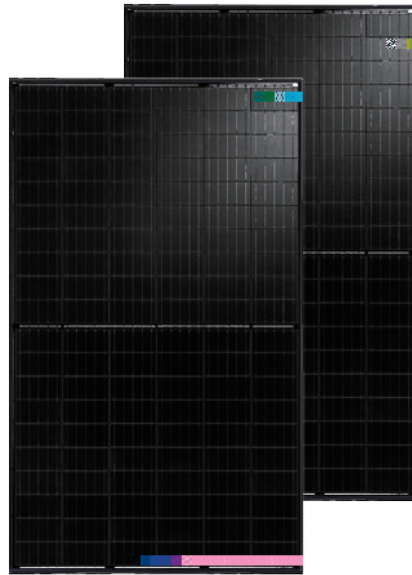

产品特性



半片电池技术



显著降低热斑风险



更低度电成本

2%



Anti
PID

优秀的抗PID性能

TUV
85 /85% RH 192

PID



IP68接线盒

体系及产品认证


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018




质量保证

12
质量保证

25
功率保证

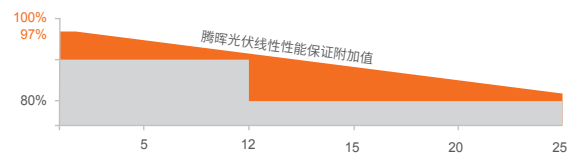



Condition	Value 1	Value 2	Value 3	Value 4	Value 5
1	33.5	33.8	34.2	34.6	35.0
2	40.1	40.3	40.5	40.7	40.9
3	10.16	10.22	10.26	10.29	10.32
4	19.0	19.3	19.6	19.9	20.1

STC	1000W/	25	AM1.5	NMOT	1000W/	20	AM1.5	1m/s
				0.98	0.97	0.98	0.98	0.99
				0.99	0.94	0.95	0.95	0.91
				0.91	0.96	0.90	0.90	0.96
				0.74	0.75	0.77	0.79	0.80
				0.90	0.90	0.90	0.91	0.91V000



1000W/m2 20% 1000W

