


# BISTAR

## 144 half-cell

PERC

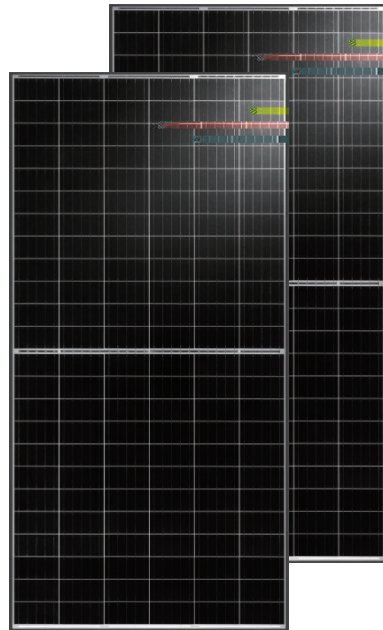

### 产品特性



半片电池技术



显著降低热斑风险



更低度电成本

2%



Anti  
PID

优秀的抗PID性能

TUV  
85 /85% RH 192

PID



IP68接线盒

### 体系及产品认证

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



### 质量保证

12

质量保证

25

功率保证



NMOT

(1)

144 (6\*24)

I-V曲线

39.45\*1.381n hes 300mm (11.811n hes

14 T01/LJ0-3-0

