


# HIPRO

TP660M  
TP660M(H)

315 - 330W  
PERC

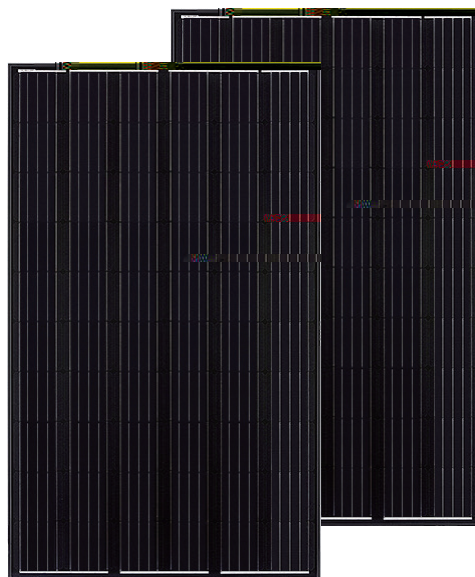

## 产品特性



优秀的抗PID性能

TUV PID 85 /85% RH 192



IP68接线盒



更低温度系数

## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



## 质量保证

12  
质量保证

25<sup>年</sup>  
功率保证

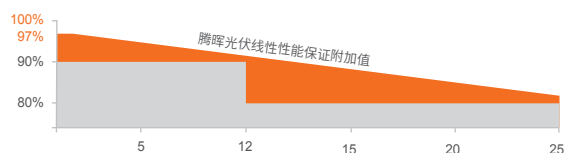

## 电性能参数

STC		0 ~ +3%			
(Pmax/W)		315	320	325	330
(Vmpp/V)		33.2	33.5	33.8	34.2
(Impp/A)		9.49	9.56	9.62	9.66
(Voc/V)		39.9	40.1	40.3	40.5
(Isc/A)		10.09	10.16	10.22	10.26
m(%)		18.9	19.2	19.5	19.8

NMOT					
(Pmax/W)		234.7	238.3	241.8	245.6
(Vmpp/V)		30.6	30.9	31.2	31.5
(Impp/A)		7.66	7.71	7.76	7.80
(Voc/V)		37.2	37.3	37.5	37.7
(Isc/A)		8.14	8.20	8.25	8.28

STC	1000W/	25	AM1.5	NMOT	800W/	20	AM1.5	1m/s
-----	--------	----	-------	------	-------	----	-------	------

## 机械参数

158.75*158.75mm (6inches)	
60 (6*10)	
18.5kg (40.79lbs)	
1665*1002*35mm (65.55*39.45*1.38inches)	
900mm (35.43inches)	
4mm <sup>2</sup> (0.006inches <sup>2</sup> )	
3.2mm	
3/6	
(1)	31 / 868 /40
(2)	31 +4 / 924 /40
IP68	


## 工作条件

1000V/1500V/DC(IEC)	
-40°C ~ +85°C	
20A	
5400pa	
0.1	
II	
100M	
MC4 Compatible	

## 温度特性

Pmax	-0.36%/°C
Voc	-0.26%/°C
Isc	+0.043%/°C
NMOT	43± 2°C

## I-V 曲线

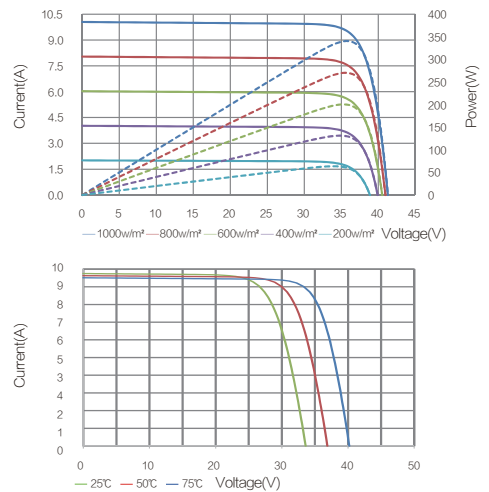

## 技术图

