


HIPRO

TP672M
TP672M(H) **72-cell**

375 - 390W
PERC

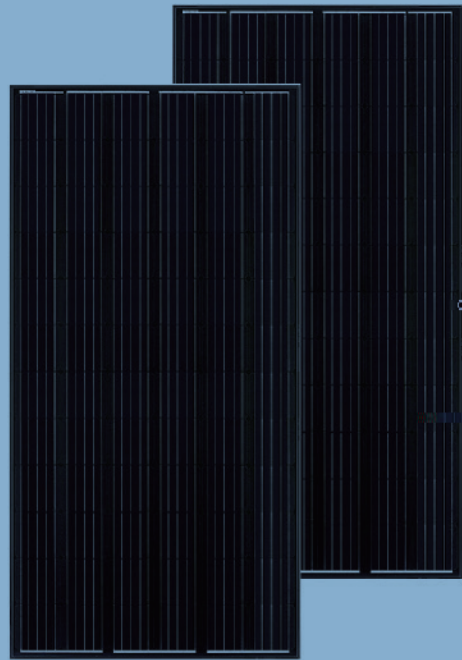

产品特性



优秀的抗PID性能

TUV PID 85 /85% RH 192



IP68接线盒



更低温度系数


体系及产品认证

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018

CEC
Approved



质量保证

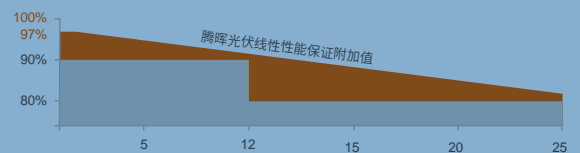

电性能参数

STC		0 ~ +3%			
(Pmax/W)		375	380	385	390
(Vmpp/V)		39.3	39.6	39.8	40.0
(Impp/A)		9.55	9.60	9.68	9.75
(Voc/V)		48.0	48.3	48.5	48.7
(Isc/A)		10.15	10.20	10.28	10.35
m(%)		18.9	19.2	19.4	19.7

NMOT					
(Pmax/W)		280	283.6	287.4	290.9
(Vmpp/V)		36.5	36.8	36.9	37.1
(Impp/A)		7.67	7.71	7.78	7.83
(Voc/V)		44.7	45.0	45.2	45.4
(Isc/A)		8.19	8.23	8.3	8.35

STC	1000W/	25	AM1.5	NMOT	800W/	20	AM1.5	1m/s
-----	--------	----	-------	------	-------	----	-------	------

机械参数

	158.75*158.75mm (6inches)		
	72 (6*12)		
	22.5kg (49.6lbs)		
	1979*1002*35mm (77.91*39.45*1.38inches)		
	1200mm (42.24inches)		
	4mm ² (0.006inches ²)		
	3.2mm		
	3/6		
(1)	31	/	682 /40
(2)	31 +4	/	726 /40
	IP68		



工作条件

	1000V/1500V/DC(IEC)
	-40°C ~ +85°C
	20A
	5400pa
	0.1
	II
	100M
	MC4 Compatible

温度特性

Pmax	-0.36%/°C
Voc	-0.26%/°C
Isc	+0.043%/°C
NMOT	43± 2°C

I-V 曲线

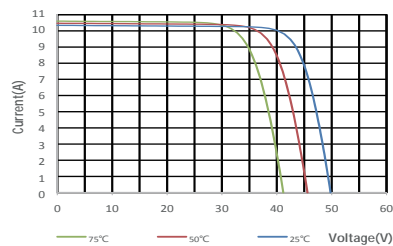

技术图