

PIPRO

TP660P
TP660P(H) **60-cell**

275 - 295W

产品特性

Anti
PID

优秀的抗PID性能

TUV PID
85 /85% RH 192



IP68接线盒



更低温度系数

体系及产品认证


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

12
质量保证

25^{years}
功率保证

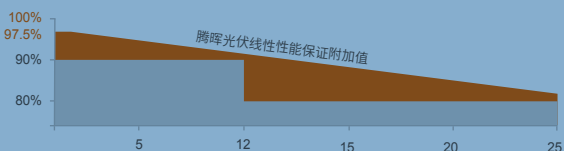

电性能参数

STC 0 ~ +3%

(Pmax/W)

(Vmpp/V)

(Impp/A)

(Voc/V)

(Isc/A)

m(%)

NMOT

(Pmax/W)

(Vmpp/V)

(Impp/A)

(Voc/V)

(Isc/A)

STC	1000W/	25	AM1.5	NMOT	800W/	20	AM1.5	1m/s
-----	--------	----	-------	------	-------	----	-------	------

机械参数

158.75*158.75mm (6inches)

4mm² (0.006inches²)

3.2mm

3/6

(1) 31 / 868 /40

(2) 31 +4 / 924 /40

IP68

工作条件

1000V/1500V/DC(IEC)

-40°C ~ +85°C

20A

5400pa

0.1

II

100M

MC4 Compatible

温度特性

Pmax -0.39%/°C

Voc -0.31%/°C

Isc +0.054%/°C

NMOT 43± 2°C

I-V 曲线

技术图

