


PIPRO

TP672P
TP672P(H) **72-cell**

330 - 350W

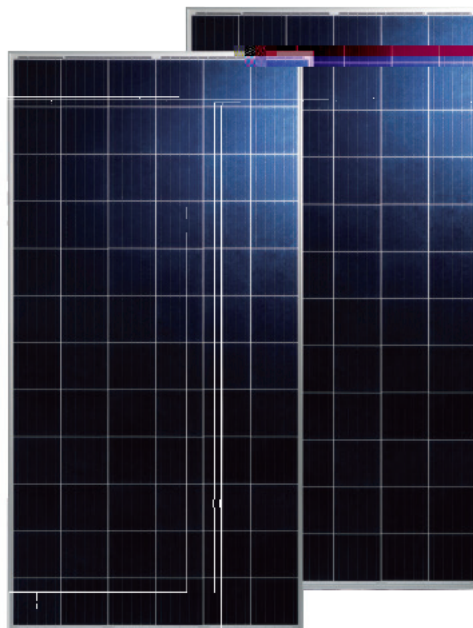

产品特性

Anti
PID

优秀的抗PID性能

TUV PID 85 /85% RH 192



IP68接线盒



更低温度系数

体系及产品认证


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

12
质量保证

25^{years}
功率保证

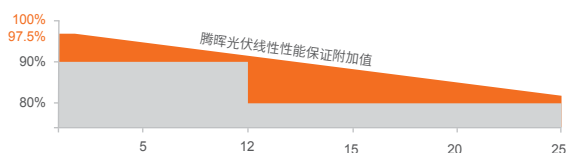

电性能参数

STC		0 ~ +3%				
(Pmax/W)		330	335	340	345	350
(Vmpp/V)		37.1	37.4	37.7	38.0	38.3
(Impp/A)		8.89	8.96	9.02	9.08	9.14
(Voc/V)		45.5	45.7	46.0	46.2	46.5
(Isc/A)		9.40	9.46	9.51	9.58	9.64
m(%)		16.6	16.9	17.1	17.4	17.7
NMOT						
(Pmax/W)		245.6	249.5	253.1	256.8	260.5
(Vmpp/V)		34.5	34.8	35.0	35.3	35.5
(Impp/A)		7.12	7.17	7.22	7.28	7.33
(Voc/V)		42.3	42.5	42.7	42.9	43.2
(Isc/A)		7.60	7.65	7.69	7.75	7.80
STC	1000W/	25	AM1.5	NMOT	800W/	20 AM1.5 1m/s

机械参数

	158.75*158.75mm (6inches)
	72 (6*12)
	22.5kg (49.6lbs)
	1979*1002*35mm (77.91*39.45*1.38inches)
	1200mm (35.43inches)
	4mm ² (0.006inches ²)
	3.2mm
	3/6
(1)	31 / 682 /40
(2)	31 +4 / 726 /40
	IP68


工作条件

	1000V/1500V/DC(IEC)
	-40°C ~ +85°C
	20A
	5400pa
	0.1
	II
	100M
	MC4 Compatible

温度特性

Pmax	-0.39%/°C
Voc	-0.31%/°C
Isc	+0.054%/°C
NMOT	43± 2°C

I-V 曲线

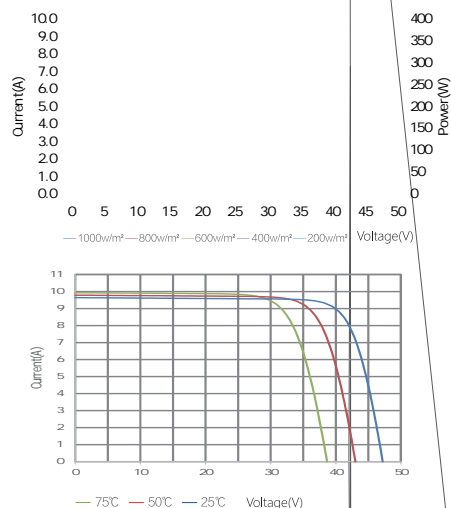

技术图

