


BISTAR

150 cell



KEY FEATURES

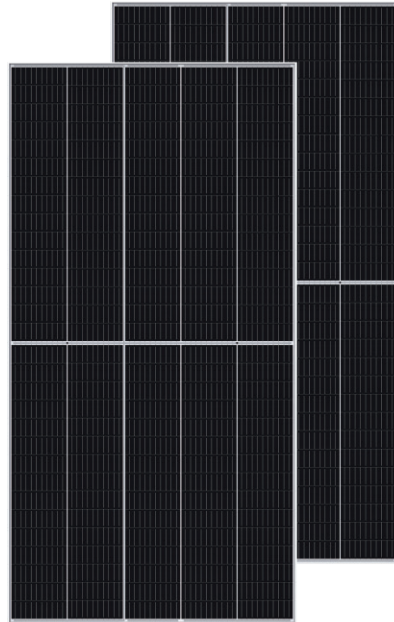

10BB half-cut cell technology

New circuit design, lower internal current, lower Rs loss
Ga doped wafer, attenuation <



Significantly lower the risk of hot spot



Lower LCOE



Excellent Anti-PID performance



IP68 junction box

SYSTEM & PRODUCT CERTIFICATES

-
-
-
-




PERFORMANCE WARRANTY

12 years
Quality assurance

25 years
Power output guarantee



Standard Performance Warranty

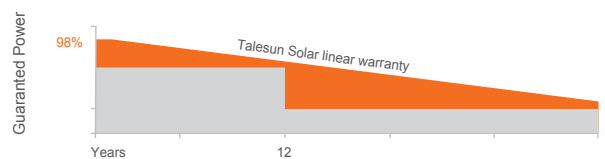

ELECTRICAL PARAMETERS

Operating Current (Impp/A)

Operating Current (Impp/A)

2

2

MECHANICAL SPECIFICATION

Cell Type

Cell Dimensions

Cell Arrangement

2

2

Front Glass

AR Coating Tempered Glass

Packing Configuration (1)

Frame

IP68

OPERATING CONDITIONS

Operating Temperature

Safety Class

II



Resistance

Connector

TEMPERATURE COEFFICIENT

Temperature Coefficient Isc

I-V CURVE

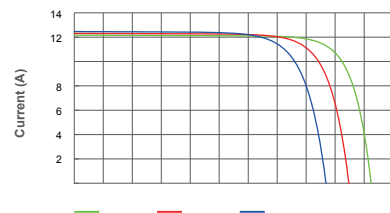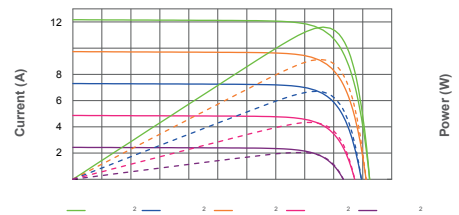

TECHNICAL DRAWINGS

