


# BIPRO

TP6G72M  
TP6G72M(H) **144 half-cell**

**395 - 415W**

bifacial transparent single glass  
9BB half-cut mono perc

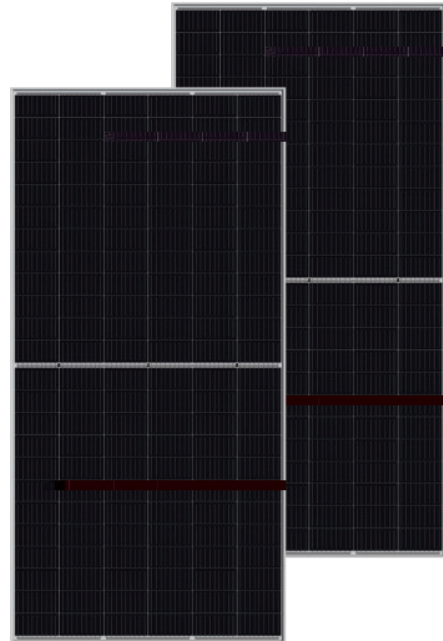

## KEY FEATURES



### 9BB half-cut cell technology

New circuit design, lower internal current, lower Rs loss



### Industry leading high yield

Bifacial PERC cell technology,  
5%-25% more yield depends on different conditions



### Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



### Wider application

No water-permeability and high wear-resistance,  
can be widely used in high-humid, windy and dusty area



### IP68 junction box

High waterproof level

## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




## PERFORMANCE WARRANTY



Linear Performance Warranty

Standard Performance Warranty

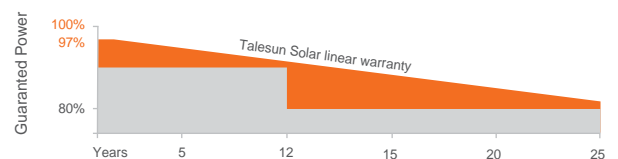

## ELECTRICAL PARAMETERS

### Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	395	400	405	410	415
Operating Voltage (Vmpp/V)	41.1	41.4	41.7	42.0	42.3
Operating Current (Impp/A)	9.61	9.67	9.72	9.77	9.82
Open-Circuit Voltage (Voc/V)	48.9	49.1	49.3	49.5	49.7
Short-Circuit Current (Isc/A)	10.14	10.20	10.26	10.32	10.38
Module Efficiency $\eta$ m(%)	19.3	19.5	19.7	20.0	20.2

### Performance at NMOT

Maximum Power (Pmax/W)	295	298	302	306	309
Operating Voltage (Vmpp/V)	38.3	38.5	38.8	39.0	39.2
Operating Current (Impp/A)	7.70	7.75	7.80	7.86	7.91
Open-Circuit Voltage (Voc/V)	45.7	45.9	46.1	46.3	46.4
Short-Circuit Current (Isc/A)	8.18	8.23	8.27	8.32	8.37

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5    NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

### Electrical characteristics with different rear side power gain (refer to 400W front)

Pmax gain	Pmax/W	Vmpp/V	Impp/A	Voc/V	Isc/A
5%	420	41.4	10.14	49.1	10.71
10%	440	41.4	10.63	49.1	11.22
15%	460	41.4	11.11	49.1	11.73
20%	480	41.4	11.59	49.1	12.24
25%	500	41.4	12.08	49.1	12.75

## MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	158.75*158.75mm
Cell Arrangement	144 (6*24)
Weight	23.5kg (51.8lbs)
Module Dimensions	2030*1008*35mm (79.72*39.68*1.38inches)
Cable Cross Section Size	TUV: 4mm <sup>2</sup> (0.006inches <sup>2</sup> )/UL: 12AWG
Front Glass	3.2mm (0.13inches) AR Coating Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	31pcs/carton, 682pcs/40hq
Packing Configuration (2)	31+3pcs/carton, 715pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

## I-V CURVE

