


# BISTAR

TP6H72M  
TP6H72M(H) **144 half-cell**

**390 - 410W**

PERC

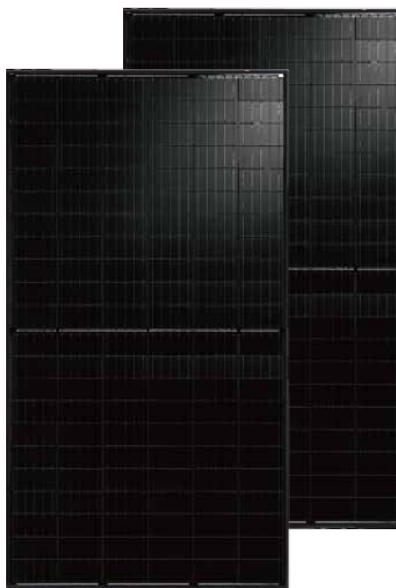

## 产品特性



半片电池技术



显著降低热斑风险



更低度电成本

2%



Anti  
PID

优秀的抗PID性能

TUV  
85 /85% RH 192

PID



IP68接线盒

## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



## 质量保证

12  
质量保证

25  
功率保证

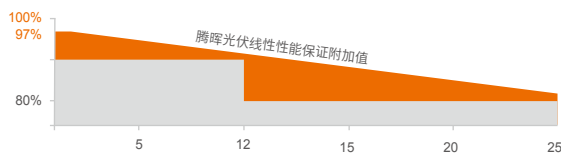


|     |             |   |
|-----|-------------|---|
|     |             | 144 (6*24)  |
|     |             | 22.5kg (49.06lbs)   |
|     |             | 2008*1002*35mm (79.06*39.45*1.38inches)                     |
|     |             | 300mm (11.81inches)   |
|     |             | TUV: 4mm <sup>2</sup> (0.006inches <sup>2</sup> )/UL: 12AWG |
|     |             | 3.2mm   |
|     |             | 3/6   |
| (1) | 31 / 682    | /40   |
| (2) | 31 +4 / 726 | /40   |
|     |             | IP68  |

### 工作条件

|  |  |                            |
|--|--|----------------------------|
|  |  | 1000V/1500V/DC(IEC)        |
|  |  | -40°C ~ +85°C              |
|  |  | 20A                        |
|  |  | : 5400Pa/ : 2400Pa         |
|  |  | 0.1                        |
|  |  | II                         |
|  |  | 100M                       |
|  |  | T01/LJQ-3-CSY/MC4/MC4-EVO2 |

### 温度特性

|      |             |
|------|-------------|
| Pmax | -0.36% /°C  |
| Voc  | -0.26% /°C  |
| Isc  | +0.043% /°C |
| NMOT | 43± 2°C     |

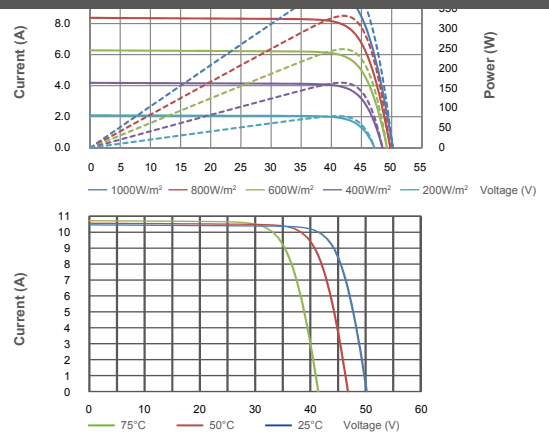

### 技术图

