


BISTAR

120 half-cell



KEY FEATURES

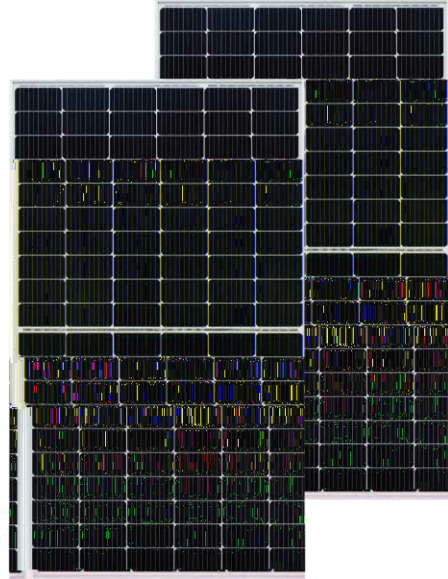

9BB half-cut



Significantly lower the risk of hot spot



Excellent Anti-PID performance



Wider application



IP68 junction box

SYSTEM & PRODUCT CERTIFICATES




PERFORMANCE WARRANTY


12

25

V CURVE



Power (W)



TEMPERATURE COEFFICIENT

