


# BISTAR

TP7F78M  
TP7F78M(H)

570 - 590W

10BB half-cut mono perc

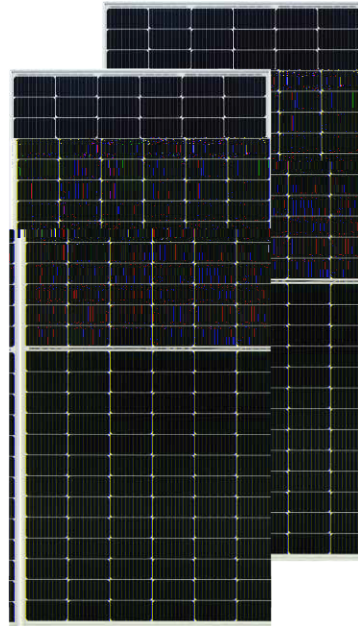

New circuit design, lower internal current, lower  $R_s$  loss  
Ga-doped wafer, attenuation < 2% (1st year) / 0.55% (Linear)



Special circuit design with much lower hot spot temperature



2% more power generation, lower LCOE



2 times of industry standard Anti-PID test by TUV SUD



High waterproof level

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



Linear Performance Warranty

Standard Performance Warranty

