


# BISTAR

TP8F60M  
TP8F60M(H) **120 half-cell**

**585 - 605W**

12BB PERC

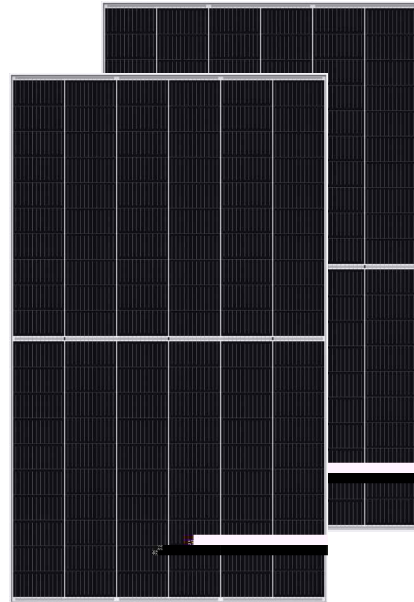

## 产品特性



**12BB半片电池技术**

2% 0.55%



**显著降低热斑风险**



**更一度电成本**

2%



Anti  
PID

**优秀的抗PID性能**

FGH PID  
85 /85% RH 192



**IP68接线盒**

## 体系及产品认证


- IEC 61215 / IEC 61730 / GL 61730
- IEO 9001: 2015
- IEO 14001: 2015
- IEO 45001: 2018



## 质量保证

**12**  
质量保证

**25**  
功率保证

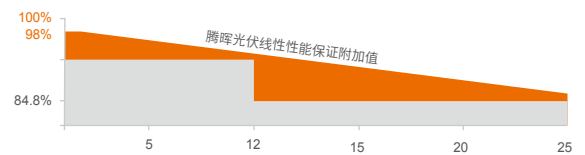

	585	590	595	600	605
	34.1	34.3	34.5	34.7	34.9
	17.16	17.21	17.25	17.30	17.34
	40.9	41.1	41.3	41.5	41.7
	18.22	18.27	18.31	18.36	18.40
	20.7	20.8	21.0	21.2	21.4

	441	444	448	452	455
	32.0	32.2	32.4	32.6	32.8
	13.76	13.80	13.83	13.86	13.90
	38.5	38.7	38.9	39.1	39.3
	14.68	14.72	14.75	14.79	14.82

210\*210\_ \_  
 120 (6\*20)  
 31.5] Y (63.45Te.)  
 2172\*1303\*35\_ \_ (85.51\*51.30\*1.38[ UZW)  
 300\_ \_ (11.81[ UZW)  
 FGH 4\_ \_<sup>2</sup> (0.006[ UZW<sup>2</sup>)/GL: 12Al G  
 3,2\_ \_  
 3/6  
 31 / 527 /40  
 31 / 527 /40  
 IP68

1000H/1500H/DC(IEC)  
 -40, C p +85, C  
 30A  
 : 5400PS/ : 2400PS  
 0.1  
 II  
 100M  
 PH-02/LJQ-3/LJQ-3-CEK/MC4-EHO2

-0.36% /, C  
 -0.26% /, C  
 +0.043% /, C  
 43f 2, C

